



RAX711-L Series Multi-Service CE/PTN Network Terminal

Raisecom RAX711-L series, as a new generation CE/PTN network terminal, is used in multi-service PSN (packet switch network) network for business leased line and mobile backhaul. It provides a legacy service over Ethernet/IP solution, which can support transmission of E1 streams over Packet Switching Networks. RAX711-L-4GC4E1-S is defined as a multi-Service PTN network terminal. It not only guarantees intercommunications across PTN/ETH/IP/MPLS network, but also supports clock and time synchronizations, which is necessary in mobile backhaul applications. Moreover, Zero-touch provisioning makes service activation much more efficient. RAX711-L-4GC4E1-S has a variety of port morphology, such as 4 x E1 ports, 4 x GE combo ports, clock signal input/output ports at client side and 2 x GE SFP ports at line side. Besides, the device is able to delivery hardware-based SLA performance monitoring through end-to-end or end-to-core topologies due to its compliance with the latest OAM standards including IEEE 802.3ah, IEEE 802.1ag and ITU-T Y.1731. In addition, the KPIs including jitter, delay, and packet loss, reported and visualized on a per-service basis on L2 and L3 via RAX711-L-4GC4E1-S.



RAX711-L-4GC



Highlights >>

Network Security	Upgraded security with port-isolation, basic ACL, broadcast/multicast/DLF storm control, unique port loopback detection, and DHCP Client/Option82 functionality
Resiliency & Protection	ITU-T G.8031 linear and ITU-T G.8032 ring protection with switching time less than 50ms IEEE 802.1ax Link Aggregation G.8131 linear protection for MPLS-TP in LSP layer and PW layer
MPLS-TP	MPLS-TP compliant to G.8113.1, providing both scalability and service security
Ethernet OAM	IEEE 802.3ah Link OAM, IEEE 802.1ag end-to-end connectivity OAM and ITU-T Y.1731 end-to-end service and performance, SLA reporting
Management	Auto-Provisioning, Plug & Play, single IP for all the connected remote devices, end to end configuration Device management and VPN service management in NView platform
SAT	Service activation test using Y.1564 up to 8 stream, act as a generator or a reflector
QoS	Advanced QoS technology allows stream-marking based on CoS, DSCP, IP precedence and priority; scheduling modes including SP, WRR, SP+WRR; WRED, flow-based mirroring/rate-limit/redirection/VLAN swapping and rewriting
Clock	Carrier-class EDD with support of SyncE for mobile backhaul applications
Power Reliability	Dual hot-swappable power supply, with voltage/temperature alarms
PWE3	encapsulation protocols: SAToP and CESoPSN

International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing. 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com


U.S.A. Headquarters

3031 north Rocky point Drive West Harborview
Building, Suite 100 Tampa Florida. 33607. USA.
Tel: +1 888 816 4808 ext 201
Fax: +1 727 547 9124
Email: ussales@raisecomusa.com

Raisecom Technology Co., Ltd.

Copyright@1999-2015
All rights reserved
Technical information is subjected to
change without notice

Application >>

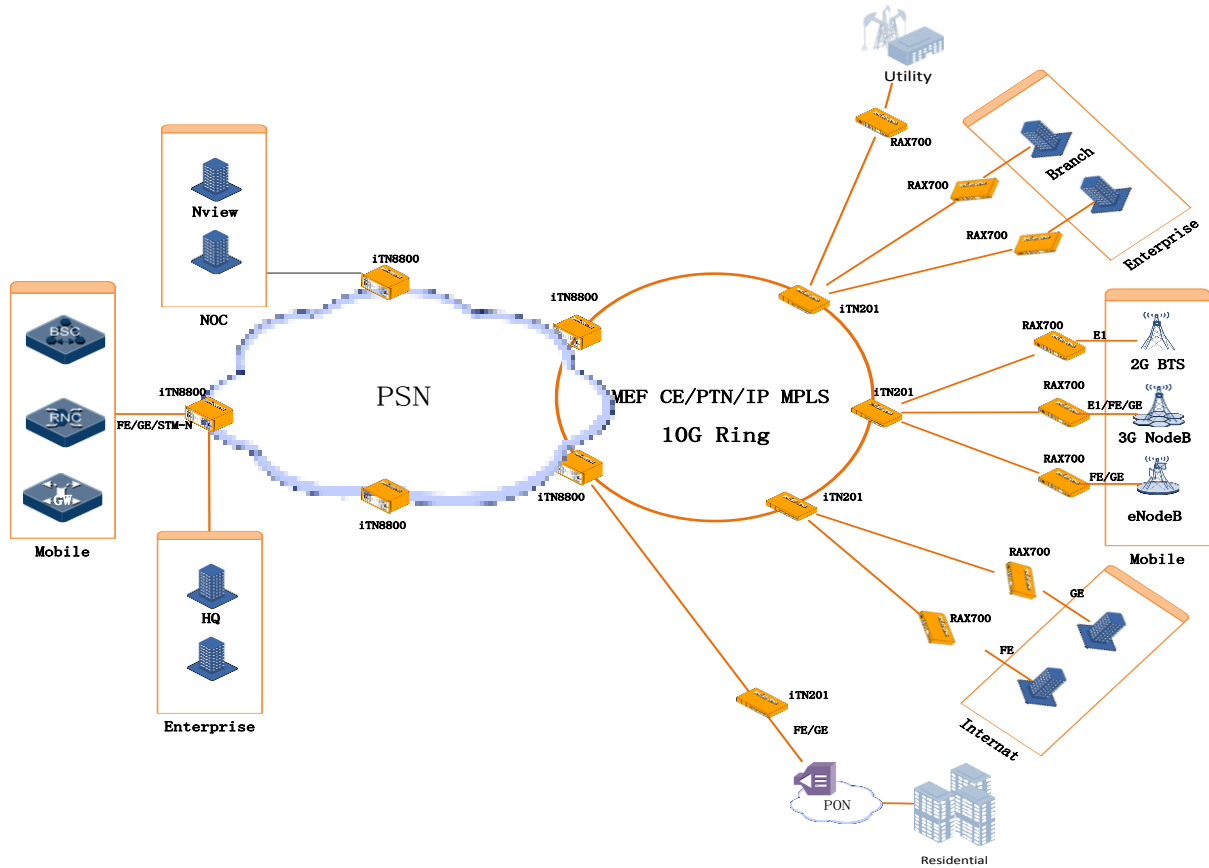

Large Enterprise, Small/Medium Business services Application

RAX711-L can work against iTN8000/iTN2100 for Large Enterprise, Small/Medium Business services. Its huge capacity, service-based QoS and protection mechanism allow “cloud computing” applications, Imaging/video distributions, business data storage/recovery, L2 VPNs, and etc. Meanwhile, such solution can guarantee Carrier-grade end-to-end SLA (hardware-based) performance monitoring for Ethernet jitter, frame delay and packet loss. L2/L3 loopback will help for service throughput testing and troubleshooting. RAX711-L can supply the MEF CE, MPLS L2VPN service.

New Generation Mobile Backhaul Application

RAX711-L is also a significant demarcation device for LTE Mobile Backhaul Networks with cost effective solution. It is easily deployed to transmit GE bandwidth to LTE eNodeB with Synchronous Ethernet to guarantee the huge mobility data application as well as voice. Its ring/linear protection complied with G.8032/1 commits to switch over within 50ms and maximum uptime for eNodeB. CFM and Y.1731 will help to report the quality of service for each EVC and interoperate with other vendor’s aggregation devices.

International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing. 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

U.S.A. Headquarters

3031 north Rocky point Drive West Harborview
Building, Suite 100 Tampa Florida. 33607. USA.
Tel: +1 888 816 4808 ext 201
Fax: +1 727 547 9124
Email: ussales@raisecomusa.com

Raisecom Technology Co., Ltd.

Copyright©1999-2015
All rights reserved
Technical information is subjected to
change without notice



Key Features >>

Switching Mode	Store and forward mode; Supports Jumbo frame
Ethernet	MTU: 12,288 Bytes Up to 8k MAC Support 4,094 VLANs (C-tag), stacked VLANs (QinQ, S-tag) Layer 2 loopback on single and multiple flows Layer 2 control protocol (L2CP) handling
Synchronization	ITU-T G.8262 Synchronous Ethernet
IP Services	DHCP client, option 61 IPv4, Static management routing
Traffic Management	Service classification per port/VLAN/CoS(DSCP) Support SP, WRR and SP+WRR scheduling modes, and up to 8 queues per port MEF-compliant 3-color policing with color-aware and color-blind mode Bandwidth throttling per port/VLAN/CoS(DSCP), CIR/EIR per flow
Security	ACL based on VLAN, CoS, MAC, EtherType, IPv4, IPv6, or user-define RADIUS, TACACS+ Storm control (broadcast, multicast, DLF)
Reliability	Link aggregation group (LAG) Interface backup ITU-T G.8031 Ethernet link protection switching (ELPS) and G.8032 Ethernet ring protection switching (ERPS) with the automatic protection switchover time less than 50ms Port/VLAN-based Ethernet local loop detection Fault propagation AC&DC dual-feed power supplies
Ethernet OAM	IEEE 802.3ah EFM-OAM link management IEEE 802.1ag connectivity fault management (CFM) with 3.3ms CCM resolution ITU-T Y.1731 performance monitoring (PM) Hardware-based frame delay (FD) measurement Y.1564 Service Activation Test Hardware-based SLA KPIs per port or EVC, which include throughput, delay, jitter, packet loss and availability Dying gasp message in case of power failure
Auto-Provisioning	Auto-establishment of management tunnels across L2/L3 networks Easy generation and distribution of massive configuration files using GUI-based toolkit
System Management	Remote management via SNMP v1/v2/v3, Telnet and SSH v1/v2

International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing. 100094, China

Tel: +86 10 8288 3305

Fax: +86 10 8288 3056

www.raisecom.com

U.S.A. Headquarters

3031 north Rocky point Drive West Harborview
Building, Suite 100 Tampa Florida. 33607. USA.

Tel: +1 888 816 4808 ext 201

Fax: +1 727 547 9124

Email: ussales@raisecomusa.com

Raisecom Technology Co., Ltd.

Copyright@1999-2015

All rights reserved

Technical information is subjected to
change without notice



Local management via console interface
MEF 36 compliant MIB
KeepAlive, RMON, LLDP, Syslog
Port/VLAN/CoS-based statistics
SFP digital diagnostic management (DDM)
temperature and CPU monitoring
Voltage and temperature monitoring
Dual system

Fault Propagation From line to client interface fault propagation (user configurable);

Client interface fault propagation

MPLS-TP MPLS OAM and APS MPLS L2VPN VPLS

Specifications >>

Performance	Switching fabric: 8Gbps;
Physical Interface	Management port: 1 console (USB); 1 out-of-band SNMP (RJ45) Client interfaces: 4 x GE combo 1 x 2Mbit/2MHz clock interface (RJ45) 4 x E1 interfaces (RJ45/DB37); Network interfaces: 2 x GE SFP
Power Specs	100/240V AC, -36 to -72V DC 24V DC Full load: ≤25W
User Conditions	Operating temperature: -10~50°C ; Storage temperature: -25~70°C ; Humidity: 10~90% non-condensing
Dimensions	220(W)mm x 180(D)mm x 43.6(H)mm
Weight	≤ 2.5Kg

Compliances >>

Standards & protocols	IEEE802.3, 802.3u IEEE802.3ad Link Aggregation IEEE802.1p, 802.1Q VLAN IEEE802.1ad QinQ IEEE802.3ah OAM IEEE802.1ag CFM ITU-T Y.1731 Services OAM ITU-T G.8031 ELPS ITU-T G.8032 ERPS IGMP v1/v2/v3 SNMPv1/v2c/v3 CE certified, UL RoHS compliance EMI Class A MEF6,8,9,10,11,13,14,16,17,20,31,36 CE2.0 MEF Certified ITU-T G.8262 RFC3985(PWE3) 4664(L2VPN)
----------------------------------	---

Ordering Information >>

RAX711-L-4GC-X	2xGE NNI, 4xGE Combo UNI, X = AC/S, AC/D, DC/S, DC/D and AC_DC power options
RAX711-L-4GE-X	2xGE NNI, 4xGE RJ45 UNI, X = AC/S, AC/D, DC/S, DC/D and AC_DC power options
RAX711-L-4GC4E1-S-X	2xGE NNI, 4xGE Combo UNI, 4xE1 DB37 unbalanced ports, X = AC/S, AC/D, DC/S, DC/D and AC_DC power options
RAX711-L-4GC4E1-BL-S-X	2xGE NNI, 4xGE Combo UNI, 4xE1 RJ45 balanced ports, X = AC/S, AC/D, DC/S, DC/D and AC_DC power options



International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing. 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

U.S.A. Headquarters

3031 north Rocky point Drive West Harborview
Building, Suite 100 Tampa Florida. 33607. USA.
Tel: +1 888 816 4808 ext 201
Fax: +1 727 547 9124
Email: ussales@raisecomusa.com

Raisecom Technology Co., Ltd.

Copyright@1999-2015
All rights reserved
Technical information is subjected to
change without notice